

F&J SPECIALTY PRODUCTS, INC.

The Nucleus of Quality Air Monitoring Programs

ANALOG LOW VOLUME AIR SAMPLERS

100 — 120 VAC



LV-1D



FJ28B



LV-22



LV-14M



FJ-28BMHT



SRS-14MHT



SRS-28BMHT

Rev: 18 February 2020

ANALOG LOW VOLUME AIR SAMPLER F&J MODEL LV-1D

NOTABLE FEATURES:

- Constant air flow regulator adjustable by user
- Chassis mounted ON-OFF switch with fuse protection
- Durable oil-less carbon vane pump designed for continuous use
- Internal intake and exhaust mufflers
- Rotometer and Vacuum gauge
- 100-120 VAC, 50/60Hz; single phase



Shown with Optional Timer

GENERAL DESCRIPTION:

Model LV-1D is a low volume air sampler consisting of a 1/4 H.P. oil-less, carbon vane vacuum pump with a flow meter, a vacuum gauge and a constant air flow regulator for use where a nearly constant air flow is desirable. The regulator holds a constant pressure drop across an in-line orifice by varying the flow through a bypass valve into the pump. This system allows the pump to work at a minimum pressure drop at all times by permitting it to run cooler; thus extending its service life. The oil-less pump requires no lubrication to maintain optimal efficiency during its service life. The pump is mounted on a base with four rubber feet. A handle is provided on the chassis to facilitate its transportation. The LV-1D is distinguished from the LV-1 air sampler in that the flow meter and vacuum gauge are mounted on a quick disconnect plastic manifold on top of the motor that facilitates maintenance operations.

PUMP TYPE:	Oil-less, carbon vane ¼ HP, 50/60 Hz, 1 PH
MAXIMUM CAPACITY:	4 CFM (113 LPM) @ 0" Hg Pressure drop
ULTIMATE VACUUM:	0-30" (0-762 mm) Hg
POWER REQUIREMENTS:	100-120VAC, 50/60Hz @ 6 amperes; single phase
FUSE PROTECTION:	6 ¼ amperes, slow blow
ELECTRICAL CORD:	All temperature, 3 wire, 16 gauge
THERMAL OVERLOAD PROTECTION:	Furnished as an integral part of the motor
CONSTANT AIRFLOW REGULATOR:	Aluminum construction with silicone diaphragm, adjustable from 1 to 3 CFM (10-100 LPM)
DIMENSIONS:	16"L × 6"W × 15 ½" H (40,6L × 19,1A × 33,6 cm Alt)
WEIGHT:	30 lbs. (17,2 kg)
HANDLE:	Black Painted Steel
INSTALLATION CATEGORY:	Pollution Degree 2
OPERATING TEMPERATURE:	0° to 104° F (-18° to 40° C)
ENCLOSURE RATING:	IPX2
AVAILABLE ROTOMETER SCALES:	
MODEL	RANGE
R10100	10-100 LPM
R13	1-3 CFM
OPTIONS	
Elapsed Time Indicator	9999.9 hours or minutes

COMBINATION FILTER HOLDER:

Durable plastic combination filter holders for F&J Model B, C or M charcoal cartridges and 47 mm, 2" or 50 mm diameter particulate filter paper are available. All models have quick-disconnect function.

STANDARD COMBINATION FILTER HOLDERS AVAILABLE:

FILTER HOLDER MODEL	CHARCOAL CARTRIDGE DIMENSIONS	PARTICULATE PAPER DIAMETER
FJ-05P	F&J Model B	2" or 50 mm
FJ-21P	F&J Model C	2" or 50 mm
FJ-35P	F&J Model B	47 mm
FJ-46P	F&J Model C	47 mm
FJ-51P	F&J Model M	2" or 50 mm
FJ-53P	F&J Model M	47 mm

ANALOG LOW VOLUME AIR SAMPLER F&J MODEL FJ28B

NOTABLE FEATURES:

- Constant air flow regulator adjustable
- Easy access powder coat painted enclosure with exhaust fan
- Durable 1/4 HP oil-less carbon vane pump designed for continuous use
- Internal intake and exhaust mufflers
- Rotometer, elapsed timer indicator and vacuum gauge
- 100-120VAC, 50/60Hz; single phase



GENERAL DESCRIPTION:

Model FJ-28B is counter-top cabinet model, low-volume air sampler with a 1/4 HP oil-less carbon vane vacuum pump, and a constant air flow regulator for use where a near constant air flow is desirable. The regulator holds a constant pressure drop across an in-line orifice by varying the flow through a bypass valve into the pump. This system allows the pump to work at a minimum head drop at all times by permitting it to run cooler; thus extending its service life. The oil-less pump requires no lubrication to maintain optimal efficiency during its service life. The FJ-28B unit may be used in enclosed areas or placed in a weather resistant aluminum cabinet for environmental sampling.

The typical operating flow range is 0.35 to 3.5 CFM (10-100 LPM).

SPECIFICATIONS:**PUMP TYPE:** Oil-less, carbon vane 1/4 HP; 1725 RPM**MAXIMUM CAPACITY:** 4 CFM (113 LPM) at 0" Hg Pressure drop**ULTIMATE VACUUM:** 25" (635 mm) Hg at sea level**VACUUM GAUGE:** 0 – 30" (0 – 762mm) Hg**POWER REQUIREMENTS:** 100 - 120VAC; 50/60 Hz at 6 amperes; single phase**FUSE PROTECTION:** 6 ¼ Amperes**ELECTRICAL CORD:** All temperature, 3-wire, 16 gauge**THERMAL OVERLOAD PROTECTION:** Furnished as an integral part of the motor**ELAPSED TIME INDICATOR:** Resettable type-0-9999.9 min. or hours**CONSTANT AIR FLOW REGULATOR:** Aluminum construction with silicone diaphragm; adjustable from 0.35 to 3.5 CFM (10-100 LPM)**DIMENSIONS:** 18 ½"L×12 ½"W×13 ¾"H (47×28.2×34.9 cm)**WEIGHT:** 43 lbs. (19.5 kg)**AVAILABLE ROTOMETER SCALES****MODEL RANGE**

R10100 10 – 100 LPM

R13 1-3 CFM

COUNTER-TOP CABINET FEATURES

- Two handles
- Exhaust fan; 100 CFM
- Easy-open maintenance door
- Removable top
- Multi-louvered sides

COMBINATION FILTER HOLDER:

Durable plastic combination filter holders for F&J Model B, C or M charcoal cartridges and 47 mm, 2" or 50 mm diameter particulate filter paper are available. All models have quick disconnect function.

STANDARD COMBINATION FILTER HOLDERS:

FILTER HOLDER MODEL	CHARCOAL CARTRIDGE <u>DIMENSIONS</u>	PARTICULATE PAPER DIAMETER
FJ-05P	F&J MODEL B	2" or 50 mm
FJ-21P	F&J MODEL C	2" or 50 mm
FJ-35P	F&J MODEL B	47 mm
FJ-46P	F&J MODEL C	47 mm
FJ-51P	F&J MODEL M	2" or 50 mm
FJ-53P	F&J MODEL M	47 mm

ENVIRONMENTAL ANALOG LOW VOLUME AIR SAMPLER F&J MODEL LV-22

NOTABLE FEATURES:

- Constant air flow regulator adjustable
- Powder coat painted aluminum enclosure with cooling fan
- Durable 1/4 HP oil-less carbon vane pump designed for continuous use
- Internal intake and exhaust mufflers
- Rotometer, elapsed timer indicator and vacuum gauge
- 100-120VAC, 50/60Hz; single phase



GENERAL DESCRIPTION:

Model LV-22 is a low volume air sampler consisting of a 1/4 HP oil-less, carbon vane vacuum pump with an air flow regulator for use where a nearly constant air flow is desirable. The regulator holds a constant pressure drop across an in-line orifice by varying the flow through a bypass valve into the pump. This system allows the pump to work at a minimum pressure drop at all times by permitting it to run cooler; thus extending its service life. The oil-less pump requires no lubrication to maintain optimal efficiency during its service life. The LV-22 is enclosed in a weather resistant aluminum environmental cabinet, Model WH-3. An optional mechanical volume totalizer is available for the LV-22 Air Sampler.

It should be noted that as pressure varies, the flow through an orifice with a constant pressure drop varies approximately as the square root of the ratio of the absolute pressure. Thus, if paper loading causes a pressure drop to one-half of the original value, the orifice is adjustable, allowing a flow rate adjustment from near-zero up to the pump's maximum capacity. Best long-term regulation is maintained at or below 2 cubic feet per minute (57 liters per minute).

The typical operating flow range is 1 to 3 CFM (10 – 100 LPM).

SPECIFICATIONS:

- PUMP TYPE:** Oil-less, carbon vane 1/4 HP; 50/60 Hz, 1 PH
- MAXIMUM CAPACITY:** 4 CFM (113 LPM) at 0" Hg Pressure drop.
- ULTIMATE VACUUM:** 25" (635 mm) Hg at sea level.
- VACUUM GAUGE:** 0" - 30" (0 to 762 mm) Hg.
- POWER REQUIREMENTS:** 100 – 120VAC; 50/60Hz at 6 amperes; single phase
- FUSE PROTECTION:** 6-1/4 Amperes
- ELECTRICAL CORD:** All temperature, 3 wire, 16 gauge
- THERMAL OVERLOAD PROTECTION:** Furnished as an integral part of the motor.
- CONSTANT AIRFLOW REGULATOR:** Aluminum construction with silicon diaphragm; adjustable from 1 to 3 CFM (10- 100 LPM).
- DIMENSIONS (w/Legs):** 32 " L x 26" W x 48 ¼ " H. (81.3 × 65.0× 122.6cm)
- AVERAGE dB:** 65.3
- WEIGHT:** 103 lbs. (46.8 Kgs.)
- INSTALLATION CATEGORY:** Pollution Degree 3
- ENCLOSURE RATING:** IPX3

AVAILABLE ROTOMETER SCALES:

<u>MODEL</u>	<u>RANGE</u>
R10100	10-100 LPM
R13	1-3 CFM

OPTIONS:

- Mechanical Volume Totalizer; Metric or English units
- DLM100-04 Digital Electronic Monitor

COMBINATION FILTER HOLDER:

Durable plastic combination filter holders for F&J Model B, C or M charcoal cartridges and 47 mm, 2" or 50 mm diameter particulate filter paper are available. All models have quick disconnect function

STANDARD COMBINATION FILTER HOLDERS:

<u>FILTER HOLDER MODEL</u>	<u>CHARCOAL CARTRIDGE DIMENSIONS</u>	<u>PARTICULATE PAPER DIAMETER</u>
FJ-05P	F&J MODEL B	2" or 50 mm
FJ-21P	F&J MODEL C	2" or 50 mm
FJ-35P	F&J MODEL B	47 mm
FJ-46P	F&J MODEL C	47 mm
FJ-51P	F&J MODEL M	2" or 50 mm
FJ-53P	F&J MODEL M	47 mm

MOBILE ANALOG LOW VOLUME AIR SAMPLER F&J MODEL LV-14M

NOTABLE FEATURES:

- Constant air flow regulator
- Durable 1/4 HP oil-less carbon vane pump designed for continuous use
- Instrument control box conveniently located
- Internal intake and exhaust mufflers
- Adjustable sampling gooseneck 122 – 213 cm (4' – 7')
- Rotometer, elapsed timer indicator and vacuum gauge
- Mobile cart with 8" hard rubber wheels
- 100-120VAC, 50/60Hz; single phase



GENERAL DESCRIPTION:

Model LV-14M is a cart mounted low volume air sampler with an adjustable, aluminum sampling gooseneck. The adjustable gooseneck permits sampling at heights varying from 4' to 7' (122 cm - 213 cm) above floor level.

The LV-14M air sampler includes a 1/4 HP oil-less, carbon vane vacuum pump with a constant airflow regulator for use where a nearly constant airflow is desirable.

The regulator holds a constant pressure drop across an in-line orifice by varying the flow through a by-pass valve into the pump. This system allows the pump to work at a minimum head drop at all times by permitting it to run cooler; thus extending its lifetime. The oil-less pump requires no lubrication to maintain optimal efficiency during its service life. The pump is mounted on a mobile cart with two rubber wheels to permit mobile transportation of the unit.

The typical operating flow range is 1 to 3.5 CFM (10 – 100 LPM).

SPECIFICATIONS:

PUMP TYPE: Oil-less, carbon vane 1/4 HP; 50/60Hz, 1 PH

MAXIMUM CAPACITY: 4 CFM (113 LPM) at 0" Hg Pressure drop

ULTIMATE VACUUM: 25" (635 mm) Hg at sea level

VACUUM GAUGE: 0" – 30" (0 – 762mm) Hg

POWER REQUIREMENTS: 100 – 120VAC; 50/60 Hz at 6 amperes; single phase

ELECTRICAL CORD: All temperature, 3-wire, 16 gauge

THERMAL OVERLOAD PROTECTION: Furnished as an integral part of the motor.

CONSTANT AIRFLOW REGULATOR: Aluminum construction with silicone diaphragm; adjustable from 1 to 3 CFM (10-100 LPM)

DIMENSIONS: 21" × 14"W × 84"H (50.8 × 26 × 213cm)

AVERAGE dB: 65.0

WEIGHT: 67 lbs. (30.4 Kgs.)

WHEELS: 8", hard rubber

SAMPLING HEIGHT: 4' to 7' (122 – 213cm)

AVAILABLE ROTOMETERS SCALES:

<u>MODEL</u>	<u>RANGE</u>
R10100	10 – 100 LPM
R13	1 -3.5 CFM

ELAPSED TIME INDICATOR: Resettable Type: 9999.9 minutes or hours.

COMBINATION FILTER HOLDER: Durable plastic combination filter holders for F&J Model B, C or M charcoal cartridges and 47 mm, 2" or 50 mm diameter particulate filter paper are available. All models have quick-disconnect function.


STANDARD COMBINATION FILTER HOLDERS AVAILABLE:

<u>FILTER HOLDER MODEL</u>	<u>CHARCOAL CARTRIDGE DIMENSIONS</u>	<u>PARTICULATE PAPER DIAMETER</u>
FJ-05P	F&J Model B	2" or 50 mm
FJ-21P	F&J Model C	2" or 50 mm
FJ-35P	F&J Model B	47 mm
FJ-46P	F&J Model C	47 mm
FJ-51P	F&J Model M	2" or 50 mm
FJ-53P	F&J Model M	47 mm

MOBILE ANALOG LOW VOLUME AIR SAMPLER F&J MODEL FJ-28BMHT

NOTABLE FEATURES:

- Adjustable constant air flow regulator
- Easy access powder coat painted enclosure with exhaust fan
- Durable 1/4 HP oil-less carbon vane pump designed for continuous use
- Internal intake and exhaust mufflers
- Rotometer, flow measurement system
- 100-120VAC, 50/60Hz; single phase

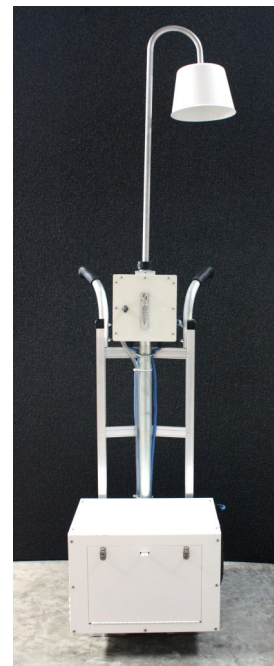

GENERAL DESCRIPTION:

The Model FJ-28BMHT heavy duty hand truck mounted mobile low volume air sampler designed for outdoor use with an adjustable, aluminum sampling gooseneck. The adjustable gooseneck permits sampling at heights varying from 4' to 7' above floor level. Model FJ-28BMHT contains a standard rotometer for flow measurements. The air sampler is contained in a powder coat painted environmental enclosure mounted ~ 4 inches above ground level.

The FJ-28BMHT Air Sampler includes an oil-less, carbon vane vacuum pump with a constant airflow regulator for use where a nearly constant airflow is desirable. The regulator holds a constant pressure drop across an in-line orifice by varying the flow through a bypass valve into the pump. This system allows the pump to work at a minimum pressure drop at all times, permitting it to run cooler, thus extending its lifetime. The oil-less pump requires no lubrication to maintain optimal efficiency during its service life. The pump is mounted on a rugged mobile hand truck with two 10.5" diameter pneumatic tires to facilitate mobile transportation of the unit.

The FJ-28BMHT is designed for continuous indoor or outdoor use. Please consult the product specifications for the design temperature range and the installation category.

The typical operating flow range is 0.5 to 3.5 CFM (14 to 100 LPM) depending upon resistance of air filters utilized.

SPECIFICATIONS:

PUMP TYPE: Oil-less, carbon vane 1/4 HP, 50/60 Hz

MAXIMUM CAPACITY: 4 CFM (115 LPM) at 0" Hg Pressure drop

ULTIMATE VACUUM: 25" (635 mm) Hg at sea level

POWER REQUIREMENTS: 100 – 120VAC, 50/60 Hz; 5.3 amperes; single phase

CIRCUIT BREAKER PROTECTION: 10 amperes

ELECTRICAL CORD: All temperature, 3 wire, 14 gauge

THERMAL OVERLOAD PROTECTION: Furnished as an integral part of the motor

CONSTANT AIRFLOW REGULATOR: Aluminum construction with silicone diaphragm; adjustable from 0.5 to 4 CFM (10-115 LPM)

DIMENSIONS: 24"L × 21"W × 55"H (61cm × 53 cm × 140 cm)

SAMPLING GOOSENECK: Adjustable to 7' (213 cm) sturdy aluminum

WHEELS: 10.5"D, pneumatic tires

WEIGHT: 80 lbs. (36 kg)

INSTALLATION CATEGORY: Pollution Degree 3

OPERATING TEMPERATURE RANGE: 20° to 122°F (-7° to 50°C)

CALIBRATION: Calibration verification 1 per year

COMMUNICATIONS INTERFACE: RS-232

COUNTER-TOP CABINET FEATURES

- Two handles
- Exhaust fan; 100 CFM
- Easy-open maintenance door
- Removable top
- Multi-louvered sides

COMBINATION FILTER HOLDER:

Durable plastic combination filter holders for F&J Model B, C or M charcoal cartridges and 47mm, 2" or 50mm diameter particulate filter paper are available. All models have quick-disconnect function.

STANDARD COMBINATION FILTER HOLDERS:

MOBILE ANALOG LOW VOLUME AIR SAMPLER F&J MODEL SRS-14MHT

NOTABLE FEATURES:

- Constant air flow regulator
- Durable 1/4 HP oil-less carbon vane pump designed for continuous use
- Instrument control box conveniently located
- Internal intake and exhaust mufflers
- Adjustable sampling gooseneck 4' – 7' (122 – 213 cm)
- Rotometer, elapsed time meter and vacuum gauge
- Heavy-duty hand truck with 10.5" pneumatic tires
- Pressure gauge
- Needle valve for calibration verification
- GFCI Protection
- Card Mounted Filter Holder
- 100 – 120VAC, 50/60Hz; single phase



GENERAL DESCRIPTION:

Model SRS-14MHT is a heavy-duty hand truck mounted low volume air sampler with an adjustable, aluminum sampling gooseneck. The adjustable gooseneck permits sampling at heights varying from 4' to 7' (122 cm - 213 cm) above floor level. The SRS-14MHT includes the GFCI protection and the card mounted filter holder with a quick disconnect fitting.

The SRS-14MHT air sampler includes a 1/4 HP oil-less, carbon vane vacuum pump with a constant air-flow regulator for use where a nearly constant airflow is desirable.

The regulator holds a constant pressure drop across an in-line orifice by varying the flow through a bypass valve into the pump. This system allows the pump to work at a minimum head drop at all times by permitting it to run cooler; thus extending its lifetime. The oil-less pump requires no lubrication to maintain optimal efficiency during its service life. The pump is mounted on a mobile cart with two rubber wheels to permit mobile transportation of the unit.

The typical operating flow range is 1 to 3.5 CFM (10 – 100 LPM).

SPECIFICATIONS:

PUMP TYPE: Oil-less, carbon vane 1/4 HP; 50/60Hz, 1 PH

MAXIMUM CAPACITY: 4 CFM (113 LPM) at 0" Hg Pressure drop

ULTIMATE VACUUM: 25" (635 mm) Hg at sea level

VACUUM GAUGE: 0" – 30" (0 – 762mm) Hg

POWER REQUIREMENTS: 100 – 120VAC; 50/60 Hz at 10 amperes; single phase

ELECTRICAL CORD: All temperature, 3-wire, 16 gauge

THERMAL OVERLOAD PROTECTION: Furnished as an integral part of the motor.

CONSTANT AIRFLOW REGULATOR: Aluminum construction with silicone diaphragm; adjustable from 1 to 3.5 CFM (10-100 LPM)

DIMENSIONS: 21" × 14"W × 84"H (50.8 × 26 × 213cm)

WEIGHT: 67 lbs. (30.4 Kgs.)


WHEELS: 10.5", pneumatic

SAMPLING HEIGHT: 4' to 7' (122 – 213cm)

AVAILABLE ROTOMETERS SCALES:

<u>MODEL</u>	<u>RANGE</u>
R10100	10 – 100 LPM
R13	1 - 3.5 CFM

ELAPSED TIME INDICATOR: Resettable Type: 9999.9 minutes or hours.

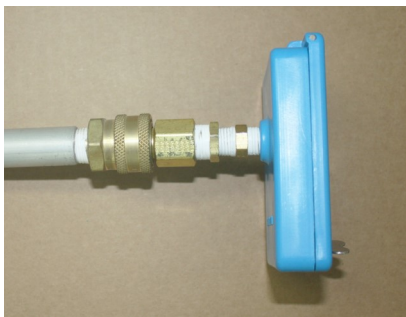STANDARD CARD MOUNTED FILTER HOLDER:

MOBILE ANALOG LOW VOLUME AIR SAMPLER F&J MODEL SRS-28BMHT

NOTABLE FEATURES:

- Constant air flow regulator adjustable
- Easy access powder coat painted enclosure with exhaust fan
- Durable 1/4 HP oil-less carbon vane pump designed for continuous use
- Internal intake and exhaust mufflers
- Rotometer, flow measurement system
- Heavy-duty hand truck with 10.5" pneumatic tires
- Weather resistant designed for outdoor use
- Pressure gauge
- Pressure needle valve for easy calibration verification
- GFCI Protection
- Card Mounted Filter Holder
- 100-120VAC, 50/60Hz; single phase



GENERAL DESCRIPTION:

The Model SRS-28BMHT heavy duty hand truck mounted mobile low volume air sampler designed for outdoor use with an adjustable, aluminum sampling gooseneck. The adjustable gooseneck permits sampling at heights varying from 4' to 7' above floor level. Model SRS-28BMHT contains a standard rotometer for flow measurements. The air sampler is contained in a powder coat painted environmental enclosure mounted ~ 4 inches above ground level.

Model SRS-28BMHT includes GFCI protection and the card mounted filter holder with a quick disconnect fitting.

The SRS-28BMHT Air Sampler includes an oil-less, carbon vane vacuum pump with a constant airflow regulator for use where a nearly constant airflow is desirable. The regulator holds a constant pressure drop across an in-line orifice by varying the flow through a bypass valve into the pump. This system allows the pump to work at a minimum pressure drop at all times, permitting it to run cooler, thus extending its lifetime. The oil-less pump requires no lubrication to maintain optimal efficiency during its service life. The pump is mounted on a rugged mobile hand truck with two 10.5" diameter pneumatic tires to facilitate mobile transportation of the unit.

The SRS-28BMHT is designed for continuous indoor or outdoor use. Please consult the product specifications for the design temperature range and the installation category.

SPECIFICATIONS:

PUMP TYPE: Oil-less, carbon vane 1/4 HP, 1725 RPM @ 60 Hz

MAXIMUM CAPACITY: 35 CFM (100 LPM) at 0" Hg Pressure drop

ULTIMATE VACUUM: 25" (635 mm) Hg at sea level

POWER REQUIREMENTS: 100 – 120VAC, 50/60 Hz; 10 amperes; single phase

CIRCUIT BREAKER PROTECTION: 10 amperes

ELECTRICAL CORD: All temperature, 3 wire, 14 gauge

THERMAL OVERLOAD PROTECTION: Furnished as an integral part of the motor

CONSTANT AIRFLOW REGULATOR: Aluminum construction with silicone diaphragm; adjustable from 0.5 to 35 CFM (10-100 LPM)

DIMENSIONS: 24"L × 21"W × 55"H (61cm × 53 cm × 140 cm)

SAMPLING GOOSENECK: Adjustable from 4' to 7' (121 cm to 213 cm) sturdy aluminum

WHEELS: 10.5"D, pneumatic tires

WEIGHT: 80 lbs. (36 kg)

INSTALLATION CATEGORY: Pollution Degree 3

OPERATING TEMPERATURE RANGE: 20° to 122°F (-7° to 50°C)


CALIBRATION: Calibration verification 1 per year

COMMUNICATIONS INTERFACE: RS-232

COUNTER-TOP CABINET FEATURES

- Two handles
- Exhaust fan; 100 CFM
- Easy-open maintenance door
- Removable top
- Multi-louvered sides

STANDARD CARD MOUNTED FILTER HOLDER:



F&J SPECIALTY PRODUCTS, INC.

The Nucleus of Quality Air Monitoring Programs

PRODUCT PROFILE

Air Sampling Systems

- High Volume Air Samplers
 - Portable Grab Samplers
 - Environmental Systems
 - Enzyme Dust Samplers
 - PM10 Systems
- Continuous Air Samplers
 - Environmental Systems
 - Portable
 - Fixed Station
- Personal Air Samplers
- Emergency Response DC Powered Air Sampling Systems

Filter Paper

- Glass Fiber
- Cellulose
- Membrane
- Quartz

Filter Holders

- Open face
- In-Line
- PAS Filter Holders
- Materials
 - Plastic
 - Aluminum
 - Stainless Steel

Radon Detection Devices

- 2-Day Passive Charcoal Canisters
- 7-Day Passive Charcoal Canisters
- Continuous Radon Monitors

Tritium Detection Systems

- Portable and Fixed Station Collection Systems utilizing Silica Gel or Molecular Sieve Absorbents
- Continuous Tritium Monitors

New Products

- Global Air Sampling Systems
- Digital Flowmeter Air Samplers
- C-14 Collection Systems
- ELITE DIGITAL LIGHT (EDL) Air Samplers
- Isokinetic Air Sampling Systems
- MEGA High Volume Air Samplers
- ULTRA High Volume (CTBTO) Air Samplers

Radioiodine Collection Cartridges

- TEDA Impregnated Charcoal
- Silver Zeolite
- Custom Cartridges
- Bulk Silver Zeolite

Air Flow Calibrators

- World Calibrator Series
- Compact Digital V.2 Series
- Mini-Calibrator